

BEST AVAILABLE COPY


PCT/IB.03/05342  
20.11.03



Europäisches  
Patentamt

European  
Patent Office

Office européen  
des brevets



Bescheinigung

Certificate

Attestation

Die angehefteten Unterla-  
gen stimmen mit der  
ursprünglich eingereichten  
Fassung der auf dem näch-  
sten Blatt bezeichneten  
europäischen Patentanmel-  
dung überein.

The attached documents  
are exact copies of the  
European patent application  
described on the following  
page, as originally filed.

Les documents fixés à  
cette attestation sont  
conformes à la version  
initialement déposée de  
la demande de brevet  
européen spécifiée à la  
page suivante.

Patentanmeldung Nr. Patent application No. Demande de brevet n°

02080425.8

Der Präsident des Europäischen Patentamts;  
im Auftrag

For the President of the European Patent Office

Le Président de l'Office européen des brevets  
p.o.

R C van Dijk

**PRIORITY  
DOCUMENT**

SUBMITTED OR TRANSMITTED IN  
COMPLIANCE WITH RULE 17.1(a) OR (b)



Europäisches  
Patentamt

European  
Patent Office

Office européen  
des brevets

Anmeldung Nr:  
Application no.: 02080425.8  
Demande no:

Anmeldetag:  
Date of filing: 19.12.02  
Date de dépôt:

Anmelder/Applicant(s)/Demandeur(s):

Koninklijke Philips Electronics N.V.  
Groenewoudseweg 1  
5621 BA Eindhoven  
PAYS-BAS

Bezeichnung der Erfindung/Title of the invention/Titre de l'invention:  
(Falls die Bezeichnung der Erfindung nicht angegeben ist, siehe Beschreibung.  
If no title is shown please refer to the description.  
Si aucun titre n'est indiqué se référer à la description.)

Diode lasers

In Anspruch genommene Priorität(en) / Priority(ies) claimed / Priorité(s)  
revendiquée(s)  
Staat/Tag/Aktenzeichen/State/Date/File no./Pays/Date/Numéro de dépôt:

Internationale Patentklassifikation/International Patent Classification/  
Classification internationale des brevets:

G11B7/00

Am Anmeldetag benannte Vertragsstaaten/Contracting states designated at date of  
filing/Etats contractants désignées lors du dépôt:

AT BE BG CH CY CZ DE DK EE ES FI FR GB GR IE IT LI LU MC NL PT SE SI SK

Diode lasers

EPO - DG 1

19.12.2002

(103)

The present invention relates in general to diode lasers. More specifically, the invention relates to a method for modulating output light from a diode laser, to a method of writing information to an optical disk comprising outputting a light signal from a laser diode device, and to an apparatus for producing a modulated light signal, said apparatus comprising

5 a diode laser device.

Diode lasers are an important part of optical storage applications. It is to be expected that dual-stripe diode lasers producing light having a wavelength in a region about 405nm (blue light) will be available in the near future. Dual-stripe lasers consist of a high-

10 power diode laser and a low-power diode laser in the same mount, separated by a few hundred microns.

Due to their open cavity (that is, a cavity with low-reflectivity facets), high-power diode lasers lend themselves well to the injection of light from, for example, the low power laser. In this way the high-power laser can for example be forced to emit on the

15 wavelength of the low-power laser (wavelength locking).

Write-once read-many media (so-called recordable discs, such as for example CD-R and DVD+R) incorporate a dye layer onto which the information is written in the form of a sequence of marks (also referred to as pits). Traditionally this is done by use of a high-power diode laser (DL) of which the current (and hence the output power) is modulated

20 according to a well-defined scheme, the so-called write strategy. Here the amount of energy absorbed by the dye is primarily determined by the output power of the DL. A mark is written by depositing enough energy such as to change the chemical composition of the dye.

It is therefore desirable, amongst other things, to reduce the amount of output

25 power required to write information to an optical disk.

According to one aspect of the present invention, there is provided a method for modulating output light from a diode laser in which a first diode laser device injects light into a second diode laser device, the second diode laser device producing an output light

signal, characterized in that the output light signal has a modulated wavelength dependent upon the injected light from the first diode laser device.

According to another aspect of the present invention, there is provided an apparatus for producing a modulated light signal, the apparatus comprising a first diode laser device operable to produce a first output light signal, and a second diode laser device operable to produce a second output light signal, and arranged to receive the first output light signal from the first diode laser device as an input light signal, characterized in that the second output light signal has a wavelength modulated in dependence upon the first output light signal.

In accordance with another aspect of the present invention, a new write mechanism is proposed in which it is not the output power of the high-power diode laser (DL) that is modulated but its wavelength. The wavelength dependence of the dye-absorption translates the DL wavelength modulation into variations of the absorption.

It will be appreciated that the principles of the present invention can be applied to modulating the output from diode laser device of any suitable wavelength, dependent upon the application of the device. Furthermore, although the device mentioned above is a dual stripe device, the principles of the present invention can be applied to any laser diode device.

In addition, although the optical data storage scheme described above uses a dye-based disk, it will be readily appreciated that the principles of the present invention can be applied to any storage technique in which the absorption of the recording medium changes with the wavelength of the incident light signal.

These and further aspects and advantages of the invention will be discussed hereinafter with reference to the appended figures, where

Fig. 1 shows a typical absorption curve for a dye used in DVD+R applications, Fig. 2 illustrates schematically an apparatus for writing to an recordable disc, Fig. 3 illustrates emission spectra from respective diode lasers, and Fig. 4 illustrates wavelength switching of a diode laser.

Figure 1 illustrates a dye-absorption (vertical axis) versus wavelength (horizontal axis) curve, and from this curve it can be seen that in a method of writing information to write-once read-many discs embodying the present invention, wavelength modulation is utilized.

Figure 2 illustrates one example apparatus for producing a wavelength-modulated signal from a diode laser. In this example, light output from a low-power diode laser (DL), called the master laser (ML) 1, is reflected by means of the polarizing beam-splitter (PBS) 8 and injected into a high-power DL, called the slave laser (SL) 2. Before the light signal from the ML 1 is injected into the SL 2 its linear polarization is changed to circular polarization by passing the light through a  $\lambda/4$ -plate 4. The ML 1 produces a light signal which passes via a grating G and through a  $\lambda/2$ -plate 6 into the polarizing beam-splitter (PBS) 8. The grating serves to reflect the first diffracted order back to the ML 1 in order to stabilize the output of the ML 1. The zero-th diffractive order is reflected towards the SL 2, and is injected into the SL 2 via a  $\lambda/4$ -plate and then a lens CL2. Light output from the SL 2 is output through the lens CL2 and the  $\lambda/4$ -plate 4 to the PBS 8. The light output from the SL 2 passes through the PBS 8 and a second  $\lambda/4$ -plate 9 to an output lens (objective lens) OL1.

The emission spectrum of the SL close to threshold is shown in the upper part of Fig. 3. It consists of several modes symbolized by vertical bars.

Generally, the wavelength of low-power diode lasers is shorter than their high-power counterparts. This is symbolized in Fig. 3 with the vertical arrow indicating the position of the wavelength of the ML 1. In the same figure  $\lambda_{SL}$  symbolizes the position of the emission-wavelength of the SL 2 above threshold and without injection from the ML 1. The mode of the SL 2 which is closest to  $\lambda_{ML}$  and at the same time fulfils  $\lambda_{ML} - \lambda_{SL,m} > 0$  is indicated with  $\lambda_{SL,m}$ . The amount of injected light is determined by the emission power of the ML 1 and when this amount exceeds a certain value  $P_{LOCK}$  the wavelength of the SL  $\lambda_{SL,m}$  locks to the wavelength of the ML, i.e.  $\lambda_{SL,m} = \lambda_{ML}$ . Hence the SL 2 starts to laser with the emission wavelength  $\lambda_{ML}$ . Reducing the emission power of the ML 1 below the locking level causes the wavelength of the SL to return to  $\lambda_{SL}$ .

As the wavelength of the SL 2 is switched between the free-running value  $\lambda_{SL}$  and the injection-locked value  $\lambda_{ML}$ , the absorption of the emitted light from the SL 2 also changes. This is due to the fact that the wavelengths are situated on the slope of the dye absorption curve.

Without injection from the ML 1 a certain amount of light from the SL 2 is absorbed in the dye layer. This amount is proportional to the absorption coefficient  $\alpha(\lambda = \lambda_{SL})$  at the wavelength of the SL 2 (without injection). The dependence of  $\alpha$  on the wavelength is shown in Fig. 1. When light from the ML 1 is injected into the SL 2 the wavelength of the SL 2 locks to the wavelength of the ML 1. The absorption of the light from the SL 2 is then proportional to  $\alpha(\lambda = \lambda_{SL,m} = \lambda_{ML})$ . Since locking occurs when  $\lambda_{SL} - \lambda_{SL,m} > 0$  we have, with the

use of Fig. 1, that  $\alpha(\lambda=\lambda_{SL,m}) > \alpha(\lambda=\lambda_{SL})$ . When the absorption is large, that is, for  $\alpha(\lambda=\lambda_{SL,m})$ , a mark is written in the dye and information is thereby stored on the disk.

Using a method embodying the present invention, moves the wavelength of the high-power slave diode laser (DL) in the direction of shorter wavelengths, see Fig. 3. This is a clear advantage since as the wavelength decreases the dye-absorption increases, see Fig. 1. Due to the increased absorption less output power from the high-power DL is needed in order to write a mark in the dye. This has consequences for high-speed recording where the amount of emission power needed in order to write a mark increases rapidly with speed. Accordingly, with the outlined approach higher speeds could be reached with the same amount of DL output power.

In this way the constraints on what type of high-power DLs that could be used is also relaxed.

Further, adapting this implementation means that information can be written to recordable-discs without modulating the current of the high-power diode laser. It is the current of the low-power diode laser (and hence its emission power) that is modulated and via injection this is translated into wavelength variations of the high-power diode laser.

It is noted that the present invention can be applied not only to diode lasers producing light having a wavelength in a region about 405nm (blue light), but also to diode lasers producing light at alternative wavelengths such as for example about 650nm (red light) and about 780nm (infrared light).

CLAIMS:

EPO - DG 1

19.12.2002

(103)

1. A method for modulating output light from a diode laser in which a first diode laser device injects light into a second diode laser device, the second diode laser device producing an output light signal, characterized in that the output light signal has a wavelength dependent upon the wavelength of the light injected from the first diode laser device.  
5
2. A method as claimed in claim 1, wherein the second diode laser device has an unmodulated output wavelength and a modulated output wavelength, the unmodulated output wavelength being output in the absence of light injected from the first diode laser device, and the modulated output wavelength being output in the presence of light injected from the first  
10 diode laser device.
3. A method as claimed in claim 2, wherein the unmodulated output wavelength is longer than the modulated output wavelength.
- 15 4. A method as claimed in claim 1, 2, or 3, wherein the first diode laser device is a low power device.
5. A method as claimed in claim 1, 2, or 3, wherein the second diode laser device is a high power device.  
20
6. A method of writing information to an optical disk comprising outputting a light signal from a laser diode device, the light signal being modulated in accordance with a method as claimed in any one of claims 1 to 5.
- 25 7. A method as claimed in claim 6, wherein the information is written to the optical disk by supplying the light signal to a dye layer in the disk.

8. A method as claimed in claim 6, wherein the information is written to the optical disk by supplying the light signal to a layer in the disk, which layer has a light absorption coefficient that varies with wavelength of incident light.

5 9. An apparatus for producing a modulated light signal, the apparatus comprising:  
a first diode laser device operable to produce a first output light signal; and  
a second diode laser device operable to produce a second output light signal,  
and arranged to receive the first output light signal from the first diode laser device as an  
10 input light signal,  
characterized in that the second output light signal has a wavelength  
modulated in dependence upon the first output light signal.

10. An apparatus as claimed in claim 9, wherein the second diode laser device has  
15 an unmodulated output wavelength and a modulated output wavelength, the second diode  
laser device being operable to output the unmodulated output wavelength in the absence of  
light injected from the first diode laser device, and to output the modulated output  
wavelength in the presence of light injected from the first diode laser device.

20 11. An apparatus as claimed in claim 10, wherein the unmodulated output  
wavelength is longer than the modulated output wavelength.

12. An apparatus as claimed in claim 9, 10, or 11, wherein the first diode laser  
device is a low power device.

25 13. An apparatus as claimed in claim 9, 10, 11, or 12, wherein the second diode  
laser device is a high power device.

14. An apparatus as claimed in claim 9, 10, 11, 12, or 13,, wherein the first diode  
30 laser device is operable to inject the first output light signal into the second diode laser device  
via a polarizing beam splitter.

15. An apparatus as claimed in claim 14, wherein the first output light signal is  
supplied to the polarizing beam splitter via a polarization adjustment device.

PHNL021432EPP

7

16.12.2002

16. An apparatus for writing information to an optical disk, including an apparatus as claimed in any one of claims 9 to 15.

PHNL021432EPP

8

EPO - DG 16.12.2002

19.12.2002

(103)

ABSTRACT:

5 A method is provided for modulating the output of a high power diode laser device (SL) using an injected light signal from a low power diode laser device (ML). The output of the high power device (SL) is wavelength modulated by the input signal from the low power device (ML). In addition, a new optical storage write mechanism is proposed which uses the wavelength modulation technique. Wavelength dependence of the absorption of the recording layer of an optical disk translates the diode laser wavelength modulation into variations of the absorption.

Fig. 2

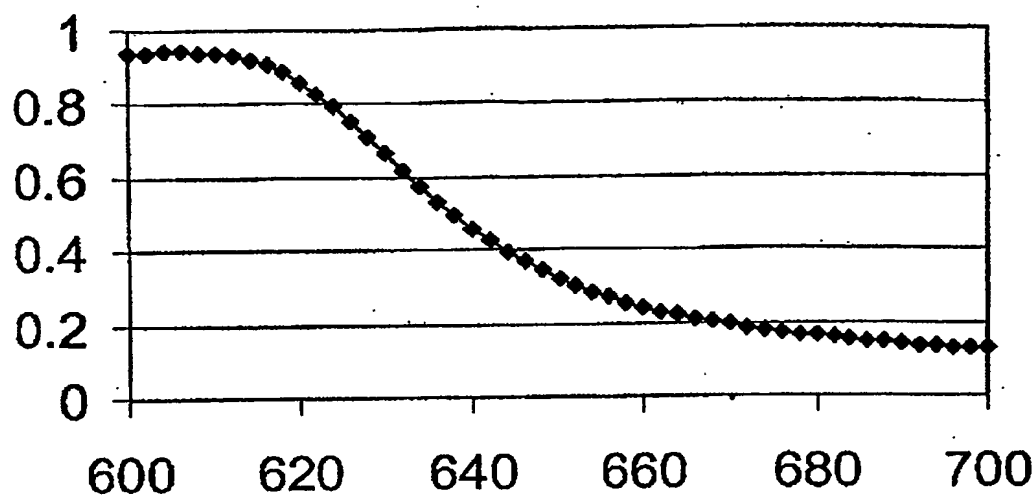
**Absorption versus wavelength**

FIG.1

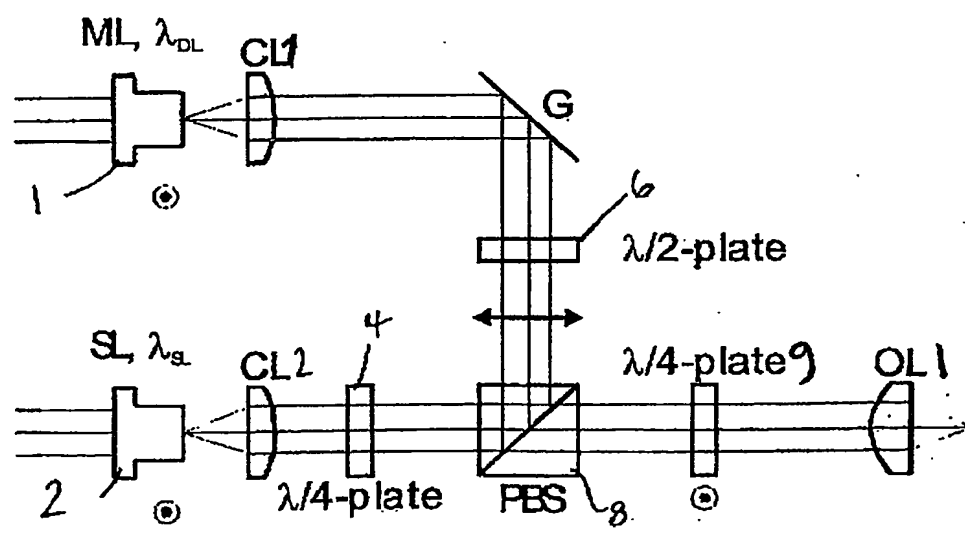


FIG.2

2/2

Injection Wavelength

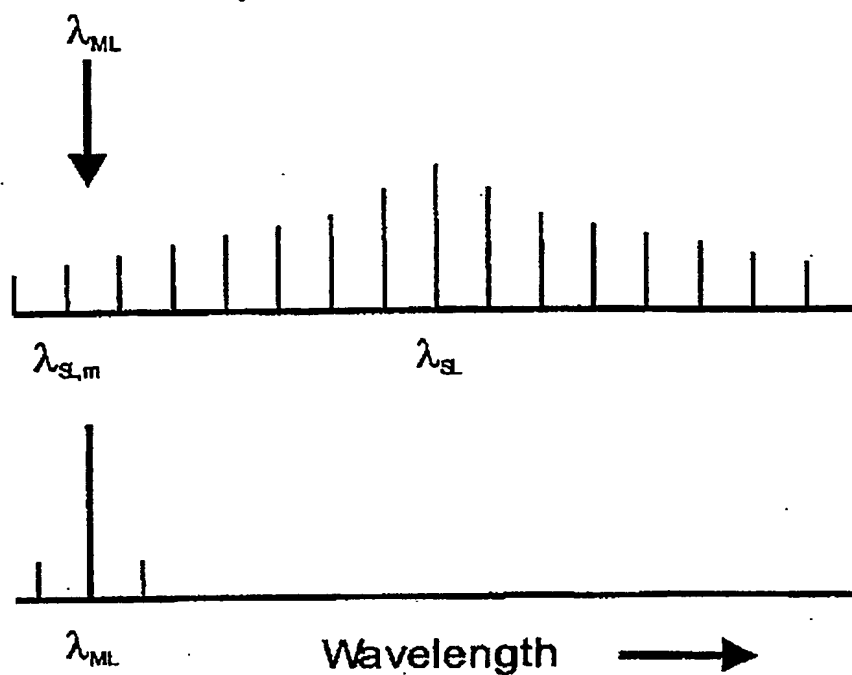


FIG.3

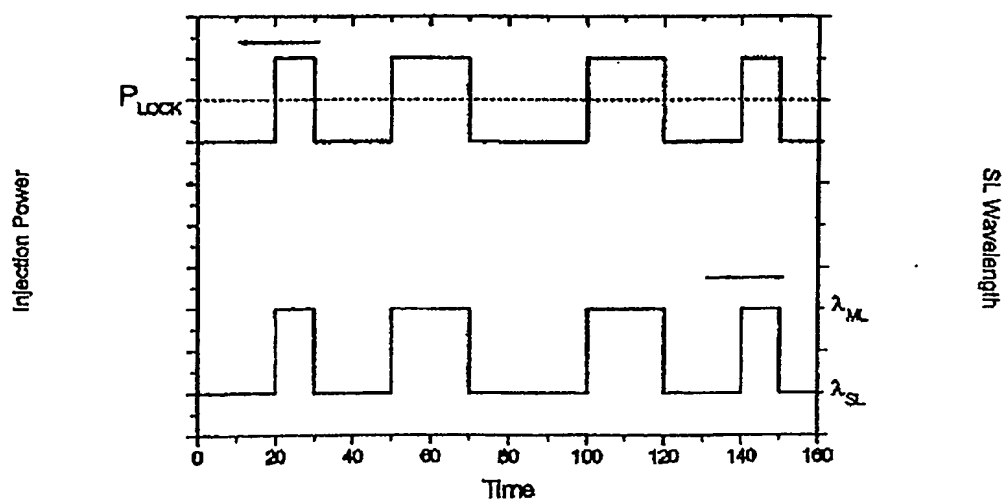


FIG.4

**This Page is Inserted by IFW Indexing and Scanning  
Operations and is not part of the Official Record**

**BEST AVAILABLE IMAGES**

Defective images within this document are accurate representations of the original documents submitted by the applicant.

Defects in the images include but are not limited to the items checked:

- ☒ **BLACK BORDERS**
- ☐ **IMAGE CUT OFF AT TOP, BOTTOM OR SIDES**
- ☐ **FADED TEXT OR DRAWING**
- ☐ **BLURRED OR ILLEGIBLE TEXT OR DRAWING**
- ☐ **SKEWED/SLANTED IMAGES**
- ☐ **COLOR OR BLACK AND WHITE PHOTOGRAPHS**
- ☐ **GRAY SCALE DOCUMENTS**
- ☒ **LINES OR MARKS ON ORIGINAL DOCUMENT**
- ☐ **REFERENCE(S) OR EXHIBIT(S) SUBMITTED ARE POOR QUALITY**
- ☒ **OTHER:** \_\_\_\_\_

**IMAGES ARE BEST AVAILABLE COPY.**

**As rescanning these documents will not correct the image problems checked, please do not report these problems to the IFW Image Problem Mailbox.**